

*Remington*<sup>®</sup>

2592 Arkansas Hwy. 15 N  
Lonoke, AR 72086  
1-800-243-9700  
www.remingtonle.com





## IT IS OUR HONOR.

### BUILT WITH PRIDE. LOADED WITH CONFIDENCE TO DEFEND.

For more than a century, Remington has proudly supported the law enforcement and military professionals serving our country with ammunition to defend our laws and freedoms.

These elite communities know Remington's commitment to produce and provide small arms ammunition with unparalleled performance. Developed with insight from experts in these security professions and manufactured using the best raw materials and most advanced techniques, every round of Remington ammunition is subjected to extreme quality control for never-fail reliability when lives are on the line.

With rifle, handgun, and shotshell products for both duty and training, Remington offers superior shot-to-shot consistency, absolute precision, incredible stopping power, and terminal ballistics to resolve any situation and hone muscle-memory skills through repetition and practice. All Remington ammunition is proudly manufactured in the USA to the highest quality standards.



# Remington®



## A LEGACY OF PROUDLY ARMING AMERICA'S PEACEKEEPERS.

1871  
REMINGTON  
AMMUNITION WORKS  
ESTABLISHED



1991—1996

PREMIER®  
GOLDEN SABER®  
& GOLDEN  
SABER BONDED  
HANDGUN



2001

UMC®  
LEADLESS  
HANDGUN  
(Law Enforcement  
exclusive)



2003

DISINTEGRATOR  
LEAD-FREE JACKETED  
FRANGIBLE HANDGUN

TAC8® FULL POWER  
BUCKSHOT



2006

REDUCED RECOIL  
RIFLED SLUGS



2015

UMC CENTERFIRE RIFLE  
(Law Enforcement exclusive)

UMC HANDGUN  
(Law Enforcement exclusive)



1938

SLUGGER® RIFLED  
FULL POWER SLUGS  
(introduced as "Nitro Express")



1999

DISINTEGRATOR®  
LEAD-FREE FRANGIBLE  
BUCKSHOT  
TACTICAL BREACHING  
LEAD-FREE FRANGIBLE  
BUCKSHOT  
DISINTEGRATOR  
LEAD-FREE FRANGIBLE  
SABOT SLUGS



2002

PREMIER  
CORE-LOKT® ULTRA  
BONDED CENTERFIRE  
RIFLE



2005

DISINTEGRATOR  
LEAD-FREE JACKETED  
FRANGIBLE CENTERFIRE  
RIFLE



2010

DISINTEGRATOR  
COPPER/TIN FRANGIBLE  
LEAD-FREE HANDGUN



### TABLE OF CONTENTS

#### RIFLE

PREMIER RIFLE  
AMMUNITION.....7

CORE-LOKT ULTRA  
BONDED.....9

UMC RIFLE.....11

DISINTEGRATOR.....11

#### HANDGUN

GOLDEN SABER  
BONDED.....14

GOLDEN SABER HPJ.....15

HANDGUN BARRIER  
TEST RESULTS.....17

DISINTEGRATOR.....18

**NEW** RANGE CLEAN.....19

UMC HANDGUN.....20

#### SHOTGUN

SHOTGUN LOADS.....21

BALLISTIC DATA.....23

AMMUNITION

# CARRIED FOR DUTY. TRUSTED TO DEFEND.

## FLAWLESS FUNCTION IN THE FIELD.

Remington Ammunition has delivered trusted performance in the line of duty for over a century, empowering officers with superb accuracy and absolute consistency across all popular law enforcement calibers and gauges. Each round is proudly made in the USA with Remington's superior standards of quality and equipped with the proven stopping power and terminal ballistics to successfully handle any situation. It's absolute day-in, day-out reliability the job demands as only Remington ammunition can deliver.





# PREMIER RIFLE AMMUNITION

For duty and training, Remington produces a full line of duty and special application rifle ammunition with superb accuracy, consistent point-of-aim/point-of-impact, unbeatable reliability and superior terminal ballistics. Every cartridge combines the highest-quality brass and bullets with specially blended powders. When lives depend on your first shot, you can trust Remington Premier rifle ammunition.



## REMINGTON PREMIER MATCH

Loaded with both Sierra MatchKing and Berger OTM bullets, and specially blended powders for consistent velocity and exceptional accuracy | Available in 223 Remington, 6mm Creedmoor, 6.5 Creedmoor, 6.5 PRC, 6.5 Grendel, 260 Remington, 6.8mm Remington SPC, 300 AAC Blackout, and 308 Win.





# PREMIER CORE-LOKT ULTRA BONDED



Remington Premier Core-Lokt Ultra Bonded is the most advanced duty-rifle round available to Law Enforcement professionals today. Designed specifically to provide optimum performance across all operating environments, Remington Core-Lokt Ultra Bonded features a lead core metallurgically adhered to a progressively tapered jacket, ensuring consistent, predictable penetration, expansion, and weight retention across all barrier types. | Combines maximum penetration, controlled 1.8x expansion, and up to 100% original weight retention | Bullet maintains maximum integrity and stays on target through tough barriers | Available in 223 Remington 62GR PSPCLU, 308 Win 150GR PSPCLU | Made in the USA

## RIFLE

### FBI BARRIER TEST RESULTS:

All testing conducted to FBI barrier test protocol, with 308 Win, calibrated ballistic gelatin, and 18" test barrel. Results are average of several rounds, rather than "best of" results published by most manufacturers.

BARE GEL		Bullet Weight: 150gr. Penetration: 14.5" Expansion: 0.944"	Retained Weight: 145.8 gr. Percentage Wt. Retained: 97.2%	
HEAVY CLOTHING		Bullet Weight: 150gr. Penetration: 18.75" Expansion: 0.78"	Retained Weight: 150.4 gr. Percentage Wt. Retained: 100%	
STEEL		Bullet Weight: 150gr. Penetration: 19.25" Expansion: 0.775"	Retained Weight: 129.9 gr. Percentage Wt. Retained: 86.6%	
WALLBOARD		Bullet Weight: 150gr. Penetration: 16.5" Expansion: 0.745"	Retained Weight: 134.2 gr. Percentage Wt. Retained: 89.5%	
PLYWOOD		Bullet Weight: 150gr. Penetration: 15.5" Expansion: 0.905"	Retained Weight: 138.7 gr. Percentage Wt. Retained: 92.5%	
AUTO GLASS		Bullet Weight: 150gr. Penetration: 13.75" Expansion: 0.630"	Retained Weight: 97.5 gr. Percentage Wt. Retained: 65%	

# UMC RIFLE



These proven track record range rounds offer economical training in bullet weights that simulate duty rounds. Their pack configurations are optimized for law enforcement. | LE exclusive in 223 Remington 55GR FMJ and 62GR OTFB. | 1000 Round Bulk Pack 223 Remington 55GR FMJ only. | Also available in consumer packs 223 Rem FMJ, 223 Rem JHP, 22-250 Rem JHP, 224 Valkyrie FMJ, 300 AAC Blackout OTFB, 300 AAC Blackout FMJ, 30 Carbine FMJ, 6.8mm Rem SPC FMJ, 308 Win FMJ, 30-06 Sprg FMJ, 303 British FMJ, and 450 Bushmaster FMJ.



## DISINTEGRATOR

Disintegrator Lead-Free Jacketed Frangible is available in 223 Remington.



## CONNECT WITH US

FOLLOW US ONLINE AND STAY UP-TO-DATE WITH THE LATEST REMINGTON NEWS AND GEAR.



www.remington.com



Remington1816



Remington1816



Remington1816



Remington1816



# GOLDEN SABER BONDED



All the revolutionary features that make Golden Saber rounds the leading edge in tactical handgun rounds, along with the superb barrier-penetration performance of our special bonded-bullet design.

The standard for barrier-penetration performance | Through exclusive Remington process, lead core hot-bonded to brass jacket | Exceptional weight retention - up to 97% through auto glass | Reduced bullet nose diameter for precise bore alignment and match-grade accuracy | Requires less energy to initiate expansion | Jacket stiffness and wall thickness optimized to eliminate over-expansion, thus maximizing penetration | Available in 357 SIG, 9mm Luger, 40 S&W and 45 Auto | Made in the USA





# GOLDEN SABER BONDED HPJ

**PUNCHES THROUGH BARRIERS AND DELIVERS SUPERIOR TERMINAL PERFORMANCE BEYOND**



Sequence of high-speed photography showing the superior performance of Golden Saber HPJ Bonded through auto glass. Shot was set up to mimic one taken from the left front quarter of a vehicle. Frame 1: 230-gr., 45 caliber Golden Saber® Bonded bullet impacts typical windshield glass. Frames 2-4: Bullet passes through windshield. Frame 5: Emerges from the glass intact. Jacket and core held together through ASI ¼-inch laminated safety glass.




**9MM LUGER, 47-GR.**  
Auto Glass @ 10'  
1.5x expansion



**40 S&W, 180-GR.**  
Auto Glass @ 10'  
1.6x expansion



**45 AUTO, 230-GR.**  
Auto Glass @ 10'  
1.4x expansion

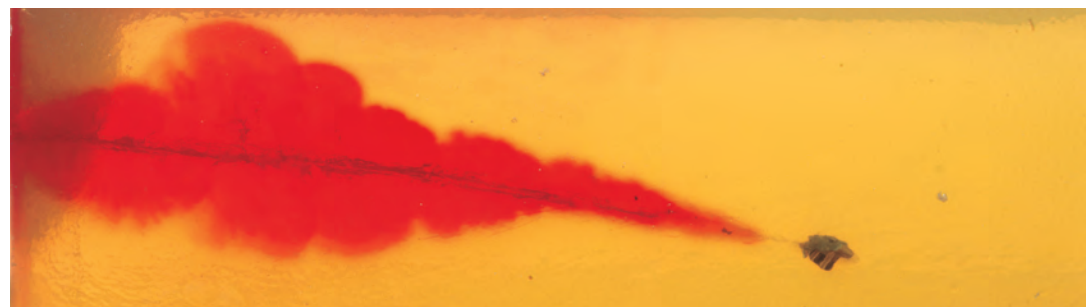

A block of gelatin placed 10" beyond the auto-glass setup to catch the bullet. Even after smashing through safety glass, the 45-cal. Golden Saber Bonded still delivers a large-volume stretch cavity with 11" of penetration.



## GOLDEN SABER BONDED HPJ (HIGH-PERFORMANCE JACKET)

Available in 380 Auto, 9mm Luger, 38 Special, 357 Mag, 40 S&W and 45 Auto | Made in the USA



This series of photos shows the totally controlled and extremely uniform expansion of Golden Saber® HPJ bullets.

Golden Saber HPJ Bonded bullets have the same industry-exclusive Driving Band profile that centers the bullet perfectly in the bore as it moves into the rifling. This results in match-grade accuracy and higher velocity conservation.



Golden Saber HPJ Bonded  
9mm Luger, 147-gr.,  
25 yds. 10 Shots, .9"

# GOLDEN SABER HPJ (HIGH-PERFORMANCE JACKET)

Terminal performance that cuts three ways. Golden Saber, the ultimate in street-proven handgun rounds. Our three key design features come together on-target for rapid, controlled expansion; deep penetration; max weight retention and exceptional accuracy. Its unique hollow-point design delivers a previously unattainable level of terminal performance.



### JACKET NOSE CUT


Forms a folded spiral pattern that curls one edge of each jacket petal inward, completely cutting through the lead core into the hollow point | This causes early cavity failure and starts controlled expansion, while still conserving energy for superior penetration | This design ensures positive expansion even at lower velocities

### HIGH-PERFORMANCE BRASS JACKET

Made entirely of thicker and stiffer cartridge brass instead of standard copper gilding metal | Jacket petals open rapidly to form shoulders that support the mushrooming core, which creates an aggressive frontal area (at least 1.6 times the bullet diameter) over a longer distance in the wound cavity

### DRIVING BAND

Located at the bullet's rear, the Driving Band is the larger base diameter behind the front section of bore diameter | This configuration mechanically locks core to jacket to prevent core/jacket separation and reduces rifling contact friction for optimum muzzle velocity | Also, the reduced front diameter allows the bullet to align precisely in the bore before the band engages the rifling to produce true match-grade accuracy and higher velocity conservation

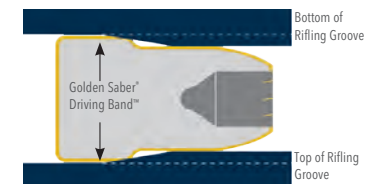

## GOLDEN SABER HPJ (HIGH-PERFORMANCE JACKET) HANDGUN BARRIER TEST RESULTS

### GOLDEN SABER BONDED

#### HEAVY CLOTHING @ 10 FEET



**9MM LUGER**  
 • Weight: 147-gr.  
 • Penetration: 16.9"  
 • Expansion: .58" (1.6x)  
 • Weight Retention: 100%



**40 S&W**  
 • Weight: 180-gr.  
 • Penetration: 14.4"  
 • Expansion: .67" (1.7x)  
 • Weight Retention: 100%



**45 AUTO**  
 • Weight: 230-gr.  
 • Penetration: 16.1"  
 • Expansion: .71" (1.6x)  
 • Weight Retention: 100%

### GOLDEN SABER HPJ (HIGH-PERFORMANCE JACKET)

#### HEAVY CLOTHING @ 10 FEET



**357 MAGNUM**  
 • Weight: 125-gr.  
 • Penetration: 15.7"  
 • Expansion: .59" (1.7x)  
 • Weight Retention: 100%



**9MM LUGER**  
 • Weight: 124-gr.  
 • Penetration: 12.0"  
 • Expansion: .62" (1.8x)  
 • Weight Retention: 99.9%



**40 S&W**  
 • Weight: 180-gr.  
 • Penetration: 13.0"  
 • Expansion: .68" (1.7x)  
 • Weight Retention: 99.9%



**45 AUTO**  
 • Weight: 230-gr.  
 • Penetration: 18.8"  
 • Expansion: .73" (1.6x)  
 • Weight Retention: 99.8%

#### AUTO GLASS @ 10 FEET



**9MM LUGER**  
 • Weight: 147-gr.  
 • Penetration: 12.1"  
 • Expansion: .55" (1.6x)  
 • Weight Retention: 92%



**40 S&W**  
 • Weight: 180-gr.  
 • Penetration: 11.2"  
 • Expansion: .62" (1.6x)  
 • Weight Retention: 97%



**45 AUTO**  
 • Weight: 230-gr.  
 • Penetration: 12.5"  
 • Expansion: .63" (1.4x)  
 • Weight Retention: 96%

#### WALLBOARD @ 10 FEET



**9MM LUGER (WALLBOARD)**  
 • Weight: 147-gr.  
 • Penetration: 13.8"  
 • Expansion: .60" (1.7x)  
 • Weight Retention: 100%

#### STEEL @ 10 FEET



**9MM LUGER (STEEL)**  
 • Weight: 147-gr.  
 • Penetration: 21.4"  
 • Expansion: .42" (1.2x)  
 • Weight Retention: 100%

## GOLDEN SABER BONDED

9mm Luger	Index Number - GS9MMD	RAMAC - 29351
Primer	1 1/2	
Load	9mm Luger +P	
Bullet Weight/Style	124-gr. BJHP Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	1180 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	384 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 11.3 inches Expansion: .54 inch dia. (1.7x) Weight Retention: 90%	

9mm Luger	Index Number - GS9MMD	RAMAC - 29353
Primer	1 1/2	
Load	Standard	
Bullet Weight/Style	147-gr. BJHP Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	990 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	320 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 11.3 inches Expansion: .54 inch dia. (1.7x) Weight Retention: 90%	

357 Sig	Index Number - GS837S8	RAMAC - 29408
Primer	5 1/2	
Load	Standard	
Bullet Weight/Style	125-gr. BJHP Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	1350 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	506 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 12.3 inches Expansion: .58 inch dia. (1.6x) Weight Retention: 82%	

40 S&W	Index Number - GS840SWA	RAMAC - 29366
Primer	5 1/2	
Load	Standard	
Bullet Weight/Style	165-gr. BJHP Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	1150 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	485 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 11.4 inches Expansion: .71 inch dia. (1.8x) Weight Retention: 92%	

40 S&W	Index Number - GS840SWB	RAMAC - 29436
Primer	5 1/2	
Load	Standard	
Bullet Weight/Style	180-gr. BJHP Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	1015 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	412 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97%	

45 AUTO	Index Number - GS845APB	RAMAC - 29416
Primer	2 1/2	
Load	Standard	
Bullet Weight/Style	230-gr. BJHP Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	875 fps using a 5" SAAMI standard test barrel	
Muzzle Energy	391 ft.-lbs.	
Accuracy	2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	5" pistol, auto glass @ 10 ft., average values Penetration: 12.5 inches Expansion: .63 inch dia. (1.4x) Weight Retention: 96%	

45 AUTO	Index Number - GS845APA	RAMAC - 29414
Primer	2 1/2	
Load	Standard	
Bullet Weight/Style	185-gr. BJHP Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	1015 fps using a 5" SAAMI standard test barrel	
Muzzle Energy	534 ft.-lbs.	
Accuracy	2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 12.1 inches Expansion: .65 inch dia. (1.4x) Weight Retention: 94%	

## GOLDEN SABER HPJ (HIGH-PERFORMANCE JACKET)

9mm Luger	Index Number - GS9MMC8	RAMAC - 29359
Primer	1 1/2	
Load	Standard	
Bullet Weight/Style	147-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	990 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	320 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 12.8 inches Expansion: .66 inch dia. (1.8x) Weight Retention: 100%	

9mm Luger +P	Index Number - GS9MMD8	RAMAC - 29358
Primer	5 1/2	
Load	+P	
Bullet Weight/Style	124-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	1180 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	384 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 14.3 inches Expansion: .54 inch dia. (1.5x) Weight Retention: 99.9%	


40 S&W	Index Number - GS40SWAB	RAMAC - R29429
Primer	5 1/2	
Load	Standard	
Bullet Weight/Style	165-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	1150 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	485 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 14.1 inches Expansion: .60 inch dia. (1.5x) Weight Retention: 100%	

40 S&W	Index Number - GS40SWBB	RAMAC - R29430
Primer	5 1/2	
Load	Standard	
Bullet Weight/Style	180-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	1015 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	412 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 12.3 inches Expansion: .68 inch dia. (1.7x) Weight Retention: 99.9%	

45 AUTO	Index Number - GS45AP8B	RAMAC - 29453
Primer	2 1/2	
Load	Standard	
Bullet Weight/Style	230-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	875 fps using a 5" SAAMI standard test barrel	
Muzzle Energy	423 ft.-lbs.	
Accuracy	2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	5" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 14.8 inches Expansion: .60 inch dia. (1.3x) Weight Retention: 100%	

45 AUTO	Index Number - GS45APCB	RAMAC - 29457
Primer	2 1/2	
Load	Standard	
Bullet Weight/Style	230-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	875 fps using a 5" SAAMI standard test barrel	
Muzzle Energy	391 ft.-lbs.	
Accuracy	2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	5" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 15.0 inches Expansion: .71 inch dia. (1.6x) Weight Retention: 100%	

### MUZZLE FLASH COMPARISON

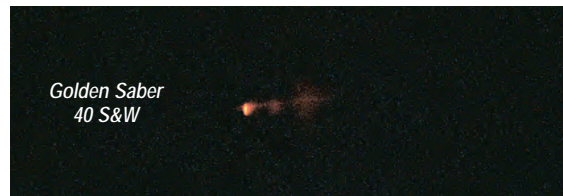

Golden Saber  
40 S&W



Regular  
40 S&W

All Golden Saber powders are treated with a chemical flash suppressant that retards flame propagation. This minimizes night blindness for the shooter while helping to conceal location.



### DISINTEGRATOR

Disintegrator Lead-Free Jacketed Frangible  
 Available in 223 Remington, 9mm Luger (+P) and 40 S&W.  
 Disintegrator CTF (Copper Tin Frangible)  
 Available in 9mm Luger (+P), 40 S&W and 45 Auto.



# RANGE CLEAN AMMUNITION

**NEW**

Range Clean is completely lead free at the shooting position and was designed exclusively for the indoor range market. It features flat nose enclosed base jacketed lead core bullets in weights that replicate duty rounds coupled with clean shooting primers to eliminate airborne lead at the firing line.



No lead at the shooting position | Flat nose enclosed based bullet (no exposed lead on heel) | Heavy Metal-Free primer | Case mouth sealed | *LE exclusive in 9mm Luger 124GR & 147GR FNEB* | Also available in 9mm Luger 115GR, 380 Auto 95GR, 40 S&W 180GR and 45 Auto 230GR FNEB.



# UMC HANDGUN BULK PACKS

These proven track record range rounds offer economical training in bullet weights that simulate duty rounds. | Tried and true FMJ range ammunition | Reduced cases per pallet quantities exclusively for law enforcement | First quality factory fresh components | Loose bulk packed for convenience and to keep costs down and sold by the pallet only | *LE exclusive in 9mm Luger 115GR FMJ, 40 S&W 180GR FMJ, 40 S&W 180GR FMJ, and 45 Auto 230GR FMJ.* | Also available in 25 Auto FMJ, 32 Auto FMJ, 357 Mag JSP, 357 Mag SJHP, 357 Sig FMJ, 38 Super Auto +P FMJ, 38 Special +P SJHP, 38 Special LRN, 38 Special FMJ, 380 Auto FMJ, 9mm Luger JHP, 9mm Luger 124GR FMJ, 9mm Luger 115GR FMJ, 9mm Luger 147GR FMJ, 10mm Auto FMJ, 40 S&W 180GR JHP, 40 S&W 180GR FMJ, 40 S&W 165GR FMJ, 44 Rem Mag JSP, 45 Auto 185 GR FMJ, 45 Auto 230GR FMJ, 45 Auto 230 JHP, 30 Super Carry FMJ, 327 Fed Mag JHP




# SLUGS 12-GAUGE DUTY SHELLS



12-gauge slugs are available in full power and reduced recoil for duty and training conditions. While the Slugger Rifled Slugs remain the industry standard, the Reduced Recoil Rifled Slugs generate 45% less recoil than a standard 1-oz. rifled slug. In the field or on the course, Remington provides the perfect slugs for any shotgun duty use.

## REDUCED RECOIL RIFLED SLUGS

Specifically engineered to improve a shooter's capabilities with a shotgun | Generates 45% less recoil than a standard 1-oz. rifled slug | Helps during training and encourages shotgun duty use | Point-of-Impact is identical to a standard 1-oz. slug out to 50 yards and only 1 1/2" lower at 100-yards | High-density polymer alignment disk under the slug's base produces enhanced accuracy | Waterproof primer for maximum reliability



Reduced Recoil Slug  
12 ga., 2 3/4", 1-oz. slug, 10 shots,  
25 yards, I.C. Choke, 1,200 FPS



## COLOR CODE YOUR LOADS

Remington slug hulls are now offered in optional Peters blue for rapid differentiation from buckshot loads | All buckshot hulls remain in standard Remington Green | With this Remington feature, personnel can easily distinguish between slugs and buckshot loads



## SLUGGER RIFLED SLUGS

Larger slug diameter for better gas sealing | High-density polymer disk under the slug produces a perfectly aligned exit from the muzzle for dramatically enhanced accuracy



Full Velocity Slugger  
12 ga., 2 3/4", 1-oz. slug,  
10 shots, 25 yards,  
I.C. Choke,  
1,560 FPS



## FRANGIBLE SABOT SLUGS

Reliable lead-free and heavy-metal-free primer | Lead-free slugs produce instant, complete breakup when impacting steel targets and steel backstops | Optimized powder blends for efficient utilization with minimum unburned residue | Accuracy performance nearly equivalent to conventional loads | Slug fragment splash-back virtually eliminated | Also available in Reduced Recoil



# TACTICAL BUCKSHOT 12-GAUGE DUTY SHELLS

## TAC 8 00-BUCKSHOT

A full load 8-pellet 00-Buck that boasts a highly concentrated 1/2" to 3/4" per yard pattern spread | Pattern controlled by utilizing 00-buck with 3% antimony lead and a precisely loaded special shot cup | Waterproof primer and mouth for maximum reliability under harsh environmental conditions



1 ROUND OF TAC 8  
fired at 15 yards, IC Choke



5 ROUNDS OF TAC 8  
fired at 15 yards, IC Choke



## BUCKSHOT

Available in standard and magnum loadings and 5 buckshot sizes: 000, 00, 0, 1 and 4 | Provides reliability, consistency and stopping power | Our 9-pellet 00-Express LE Buckshot created a new standard of pattern performance with the addition of our one-piece compression section Power Piston wad column, polymer buffering and hard lead pellets | This combination produces patterns 25% tighter than previous buckshot offerings



## REDUCED-RECOIL 00-BUCKSHOT

Made specifically for duty and training applications that encourage shotgun usage | Our 8- or 9-pellet Reduced-Recoil 00-Buckshot produces lower felt recoil by 40% for better follow-up shots | Enhanced with Power Piston shot cup, polymer buffering, and hardened 3% antimony lead pellets contributing to outstanding patterns



## FRANGIBLE BUCKSHOT

Reliable lead-free and heavy-metal-free primer | Lead-free pellets produce instant, complete breakup when impacting steel targets and backstops | Optimized powder blends for efficient utilization with minimum unburned residue | Pattern performance nearly equivalent to conventional loads | Shotcup and buffering protect shot for enhanced patterns | Pellet fragment splash-back virtually eliminated | Also available in Reduced Recoil



## TB12 BREACHING ROUND

TB12 is a mission-specific shotgun ballistic breaching round used to defeat a variety of urban structures to include exterior and interior doors. TB12 provides a dramatic reduction in collateral damage to non-combatants as well as operators through the use of a frangible material that delivers maximum energy to the breach point yet turns to a near harmless powder upon impact. TB12 is a cost-effective training and operational breaching round allowing operators to "train as they fight." The frangible property of TB12 delivers near-threat lethality in addition to being a superb breaching round, ensuring that the breacher remains operational regardless of the weapon system being used.



## UMC CENTERFIRE PISTOL & REVOLVER AMMUNITION (Packed 50 rounds per box, 10 boxes per case, 500 rounds per case)

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft./sec)			ENERGY (ft./lbs.)			MID-RANGE TRAJECTORY (inch)	
						Muzzle	25 yds.	50 yds.	Muzzle	25 yds.	50 yds.	25 yds.	50 yds.
25 Auto Pistol (6.35mm)	L2SAP	23716	1 ½	50	Full Metal Jacket	760	733	707	64	60	56	ZERO	-3.2
32 Auto (7.65mm)	L32AP	23704	1 ½	71	Full Metal Jacket	905	879	854	129	122	115	ZERO	-1.9
327 Federal Magnum	L327	R20016	5 ½	100	Jacketed Soft Point	1500	1408	1324	500	440	389	ZERO	-0.2
357 Magnum <sup>1</sup>	L357M12	23738	5 ½	125	Jacketed Soft Point	1450	1338	1240	583	497	427	ZERO	-0.3
357 SIG	L357S1	23734	5 ½	125	Full Metal Jacket	1350	1238	1146	506	425	365	ZERO	-0.5
	L357S2	23692	5 ½	125	Jacketed Hollow Point	1350	1245	1157	506	430	372	ZERO	-0.5
9mm Luger	L9MM3BPLE	23651	1 ½	115	Full Metal Jacket	1145	1092	1048	335	304	280	ZERO	-0.9
	L9MM1B	23753	1 ½	115	Jacketed Hollow Point	1145	1092	1048	335	304	280	ZERO	-0.9
	L9MM3	23728	1 ½	115	Full Metal Jacket	1145	1092	1048	335	304	280	ZERO	-0.9
	L9MM2	23718	1 ½	124	Full Metal Jacket	1110	1069	1031	339	314	292	ZERO	-1.0
	L9MM9	23732	1 ½	147	Full Metal Jacket	990	965	941	320	304	289	ZERO	-1.4
380 Auto	L380AP	23720	1 ½	95	Full Metal Jacket	955	904	860	192	172	156	ZERO	-1.8
38 Super Auto +P	L38SUP	23722	1 ½	130	Full Metal Jacket (+P)2	1215	1152	1099	426	383	348	ZERO	-0.7
	L38S2B	23771	1 ½	125	Jacketed Hollow Point (+P)2	945	921	898	248	235	224	ZERO	-1.7
38 Special	L38S11	23730	1 ½	130	Full Metal Jacket	800	787	775	185	179	173	ZERO	-2.6
	L38S5	23724	1 ½	158	Lead Round Nose	755	739	723	200	191	183	ZERO	-3.1
40 S&W	L40SW3BPLE1	23626	5 ½	180	Full Metal Jacket	990	964	940	392	371	353	ZERO	1.2
	L40SW4	23746	1 ½	165	Full Metal Jacket	1150	1040	964	485	396	339	ZERO	-1.1
	L40SW2B	23687	1 ½	180	Jacketed Hollow Point	1015	986	960	412	388	368	ZERO	-1.3
	L40SW3	23742	1 ½	180	Full Metal Jacket	990	964	940	392	371	353	ZERO	-1.4
10mm Auto	L10MM6	23706	2 ½	180	Full Metal Jacket	1150	1103	1063	528	486	451	ZERO	-0.9
44 Remington Magnum <sup>1</sup>	L44MG7	23744	2 ½	180	Jacketed Soft Point	1610	1482	1366	1036	878	745	ZERO	-0.1
	L45AP4BPLE	23653	2 ½	230	Full Metal Jacket	835	817	800	356	341	326	ZERO	-2.4
45 Auto	L45AP1	23818	2 ½	185	Full Metal Jacket	1015	981	951	423	395	371	ZERO	-1.4
	L45AP4	23726	2 ½	230	Full Metal Jacket	835	817	800	356	341	326	ZERO	-2.4
	L45AP7B	23689	2 ½	230	Jacketed Hollow Point	835	817	800	356	341	326	ZERO	-2.4

<sup>1</sup>Note: These ballistics reflect vented barrel. <sup>2</sup> Ammunition with "+P" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.

## DISINTEGRATOR® AND RANGE CLEAN® PISTOL & REVOLVER AMMUNITION

(Packed 50 rounds per box, 10 boxes per case, 500 rounds per case)

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft./sec)			ENERGY (ft./lbs.)			SHORT-RANGE TRAJECTORY	
						Muzzle	100 yds.	200 yds.	Muzzle	100 yds.	200 yds.	25 yds.	50 yds.
9mm Luger (+P) 1	CF9MMB	29460	1 ½ HMF	100	Lead-Free Jacketless, Copper/Tin Sintered, Frangible	1300	1213	1141	375	327	289	ZERO	-1.0
	FE9MM1	28358	1 1/2 LF	101	Lead-Free Jacketed, Powdered Metal Core, Frangible	1250	1175	112	350	310	277	ZERO	-1.1
9mm Luger	LL9MM11	23785	1 ½	115	Flat Nose Enclosed Base	1145	1092	1048	335	304	280	ZERO	-0.9
	LL9MM2	23811	1 ½	124	Flat Nose Enclosed Base	1110	1069	1031	339	314	292	ZERO	-1.0
	LL9MM9	23749	1 ½	147	Flat Nose Enclosed Base	990	965	941	320	304	289	ZERO	-1.4
380 Auto	LL380AP2	23805	1 ½	95	Flat Nose Enclosed Base	955	904	860	192	172	156	ZERO	-1.8
38 Spl	LL38S17	23789	1 ½	125	Flat Nose Enclosed Base	850	836	822	201	184	188	ZERO	-2.2
40 S&W	FE40SW1	28360	5 1/2 LF	141	Lead-Free Jacketed, Powdered Metal Core, Frangible	1135	1093	1056	403	374	349	ZERO	-1.3
	LL40SW5	23791	1 ½	180	Flat Nose Enclosed Base	990	964	940	392	371	353	ZERO	-1.4
45 Auto	LL45AP8	23793	2 ½	230	Flat Nose Enclosed Base	835	817	800	356	341	326	ZERO	-2.4

<sup>1</sup>Test barrel length in inches

<sup>2</sup>Ammunition with (+P) on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.

300, Accelerator, Bore, BriteBore, Bullet, CBEE 22, Core-Lokt, Cyclone, Disintegrator, DriLube, Duplex, EtronX, Express, Figure 8, Fireball, Green Color, Golden, Golden Saber, Gun Club, Hi-Speed, Kleanbore, Managed-Recoil, Nitro 27, Nitro CLP, Nitro Mag, Nitro Turkey, Nitro Steel, Peters, Pheasant, Power-Lokt, Power Piston, Premier, ProBore, R, R-P, Rangemaster, Ready, Rem, Rem Dri 35, Rem DriLube, RemCloth, Remington, Remington Law Enforcement, Remington Leadless, ShurShot, Slugger, Sportsman, STS, Subsonic, TAC 8, Thunderbolt, Ultra Bonded, Ultra Mag, UMC, Unibody, Viper, Wingmaster HD, and Yellow Jacket are trademarks of Ammunition Operations LLC, 2592 Arkansas Highway 15 N, Lonoke, AR 72086. Sierra Match King is a trademark of Sierra Bullet Co. Swift, A-Frame and Scirocco are trademarks of Swift Bullet Co. Break-Up, Brush, Duck Blind, Mossy Oak, New Break-Up and Obsession are trademarks of Haas Outdoors, Inc. V-Max is a trademark of Hornady Manufacturing Company. Advantage, Advantage Timber, AP, APG, HD and Realtree are trademarks of Jordan Outdoor Enterprises, Ltd. Lapua is a trademark of Nammo Lap XS Sight Systems, Inc.

Remington reserves the right to change or modify its products without notice. Follow the safety rules printed in firearms instruction books and on ammunition boxes. For ammunition product safety information or data sheets, write to Remington Ammunition, 2592 Arkansas Highway 15 N, Lonoke, AR 72086 or visit our website at [www.remington.com/safety-information](http://www.remington.com/safety-information). Consumer Information: (800) 243-9700. Visit us on the web at: [www.remington.com](http://www.remington.com). All Remington firearms inquiries should be directed to [www.remains.com](http://www.remains.com)

